



The fine art of measuring.



Hengesbach:

Hengesbach.

« »

Hengesbach

Hengesbach,

1953,

60

fabrice hengesbach



ESTEEMED



VALUE-CREATING



VALUE-RETAINING



VALUE-INCREASING










CULTURE OF
VALUES



VALUE-FORMING

Willkommen **Welcome**
 Bienvenida Benvenuto
 Shòu huānyíng Sevilen **удобный**
 Witamy

-	Hengesbach	:	
/		2-3	
/	/	4-5	
/	/	6-7	
/	/	8	
/	/	9	
/	/	10-11	
/	/	12-13	
/	/	14-16	
/	/	17	
	200	18-19	
			

Series 200 / 201

$\leq \pm 0.05\%$
 200
 201
 TurnDown 10

OPUSⁱ

HART[®]
COMMUNICATION PROTOCOL

EasyTransfer,

Series 100 / 101

$\leq \pm 0.15\%$
 Series 100
 Series 101
 TurnDown 10

OPUS^M

Series 050D

$\leq \pm 0.2\%$
 TurnDown 4

2



PIEZOMESS PZM,

EHEDG
-1/0 - 0/100

EL-CLASS I,



DIN 11864-1, VARIVENT[®],

DRD,

200°C,

CIP SIP

IP67 IP69K

050D, 100/101

200/201



(200)

HART[®]
COMMUNICATION PROTOCOL

CERTIFIED
EHEDG
TYPE EL - CLASS I
JANUARY 2019

Das modulare
Anschlusssystem
MODULAR
von Hengesbach


ESTEEMED

: HENGESBACH

50

Hengesbach





PIEZOTEC,

ый



KERAMESS KS

DIN 11864-1, VARIVENT®, DRD

200°C, CIP SIP

IP67 IP69K

050D, 080, 100/101 200/201

-1/0 - 100

(Series 200)

, VARIVENT®, DRD,

DIN11864,

G1/2"

clamp DIN32676,

ISO 228,

050D, 100/101 200/201



д

TPF

д д й



PZM 200/201



0,05%
EHEDG EL-



VALUE-INCREASING

: HENGESBACH

HACCP

DIN

11864-1, VARIVENT®,
DIN11851, ...




PiezoSwitch PS
EHEDG

-
-
-
- 200°C
- -1/0 - 100bar
- 4-20
-
-
-

G1" ISO 228
PZM

PNP



CIP / SIP
- safe -

TCF, TCS, TPS, ...

- ▶
- G $\frac{1}{2}$ ",
-
- ▶
- TCF
-
- TCS
-

050D, 100 200,



**KERADIFF
40**

2

- ▶
-
-
- ▶
- KERADIFF 100
-
- KERADIFF 140
-
- KERADIFF 150
-
- ▶
-
-
-
-
-
-



¼ - 18 NPT



TPS-T д

- ▶
-
-
-
-
-
-
- ▶
-

0 - 0.25 0-20

100
4 - 20





Датчики давления в химической конфигурации, включением датчика G1/2 или с установкой заподлицо

- ▶
- NG63, NG100 NG160
- 1-3
- 0/4-20 , 2/3
- 0/0.6...1/1600
-
- ▶
- RC, KC,
- DIR, PC, DMU
-
-



азделительны мембран для обрабатывающей и процедурной отраслей

- ▶
- VARIVENT®, 11851, DIN11864, EN1091 ... PZM, DIN
- , 1.4539, ... CIP SIP
-
-
-
- FDA
- EN10204
- ▶
-



PTFE



- ▶
-
-
- (pH 0-14) PTFE (FDA)
-
- ▶
-





VOLUMTEC,



StreamTec д

-
-
- DIN11864-2 A
- clamp DIN32676 DIN11851 DIN11866 A,
- DN10 DN150,
-
- 0/4-20 3
- **VolumMess:**

- ()
-
- 2-150 3/
- : Varivent®; Clamp; ;
- (DIN 11851)
- G1/2"
- : 0...100°C; CIP/SIP
- 140°C (30)



LIQUITEC

-
-
-
- G1", 2" 3-clamp, VARIVENT®,
- PNP
-
-



NKS11/NKS13

NM/NC1


-
-
- 1, NKS 11 Ø=4 / 8, NKS13 Ø=11
- NKS11 G1/2"
- NKS13 G3/4"
- NM
- / NC1 .50




NCT

-
- CIP SIP
- G1/2"
- ECTFE, 400 2000
- 3- 0/4-20
-

-
- NC1

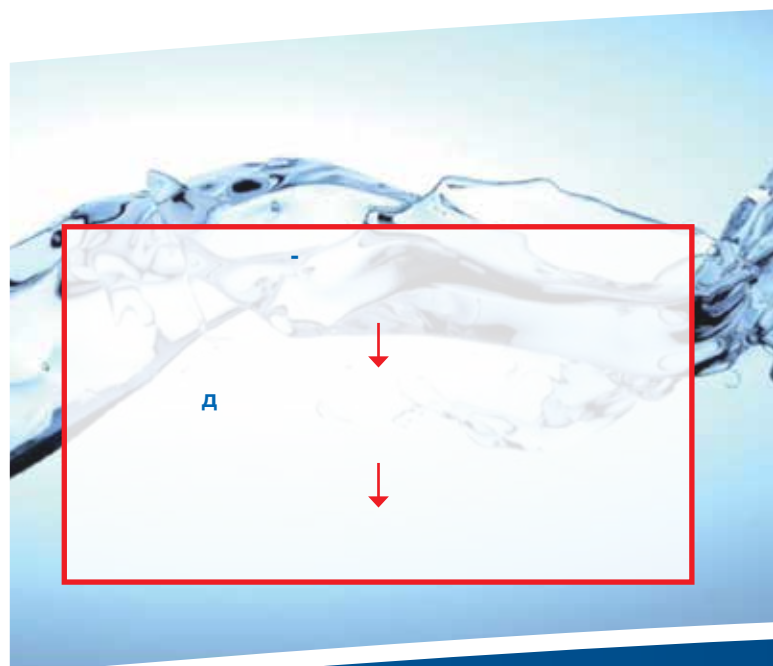



A

LEVELTEC



- CIP SIP
- teach-in
- .50
- M12x1.5 G1/2"
- . VARIVENT®



• LEVELTEC S -

• LEVELTEC L -
PFA,

• LEVELTEC LR -
PFA,



VALUE-RETAINING

: HENGESBACH



PH

(CIP)

UF/MF/RO



- 2- 4-20
- Clamp; Varivent; DIN 11851


- 2
- 2
- 9
- NTU () 0 4.000 NTU 30%
- : 125°C / 150°C



pH peHaMess d

pH

CIP/SIP
 Varivent®, Clamp,
 (DIN11851)

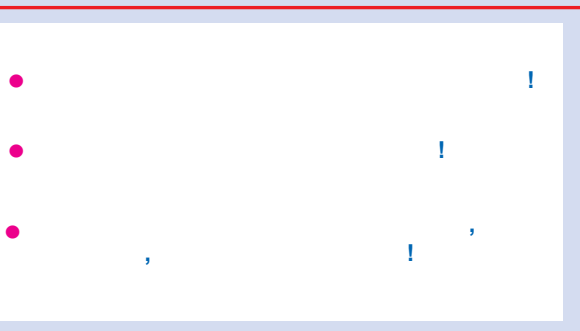



CONDUTEC

ДУ НЫЙ О ОД О INDUTEC

-
- 4-20
- 2
-
- DIN 11851, clamp DIN32676,
- PZM VARIVENT®, G1B
- , 4-
-
-
- 0-5µS/cm - 0-500mS/cm
-
- CIP
- 2-

-
- 4-20
- 0-500µS/cm 0-2000mS/cm,
- 2
- 4
-
- DIN 11851 VARIVENT®
-
- CIP
-



VALUE-CREATING

: HENGESBACH

Hengesbach






Quicktemp

TP60/TW39...T500

- Quicktemp,
- 2- 4-20 , HART® Profibus
- 'Quick Calibrate Inside',

- TP60 TP62 Quicktemp,
- TP38 G3/8"
- Quicktemp
- , TP16 - G1/2"
- , VARIVENT®, DIN32676, G1B, ...

- HACCP

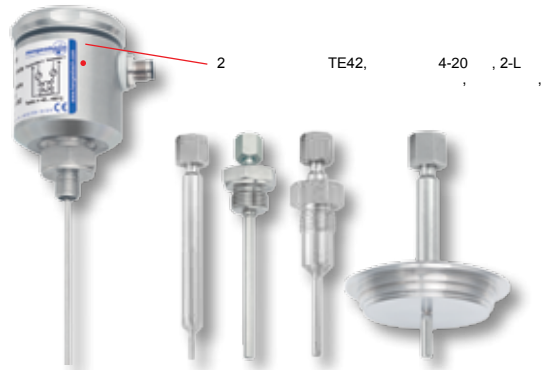

Quicktemp

TP62/TW39...T500

- 1 - Quicktemp
- (PT100,)
- M12x1




TEMA

- TEMA (, TP60, TP70, TP16)
- 3
- , - 50 - + 200°C,
- 10 °C
- °C °F, 4-20

CIP / SIP
- safe -



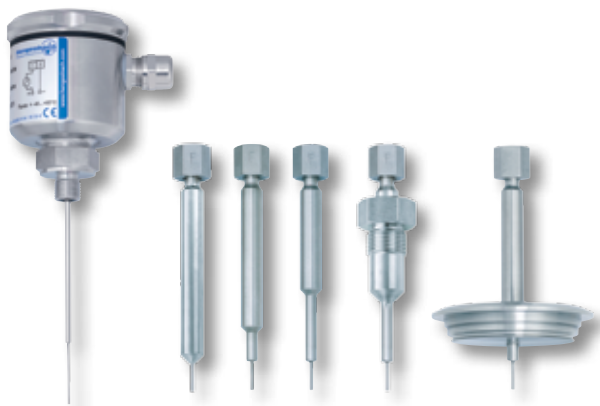

Quicktemp RS TP70/TW39...T800, H

D = 2,2




- d = 2,2
- 1
- QS Quicktemp
- VARIVENT®
-
-

QUICKTEMP/RS

QUICKTEMP

QUICKTEMP
mit easy connect


QUICK-CALIBRATE-INSIDE

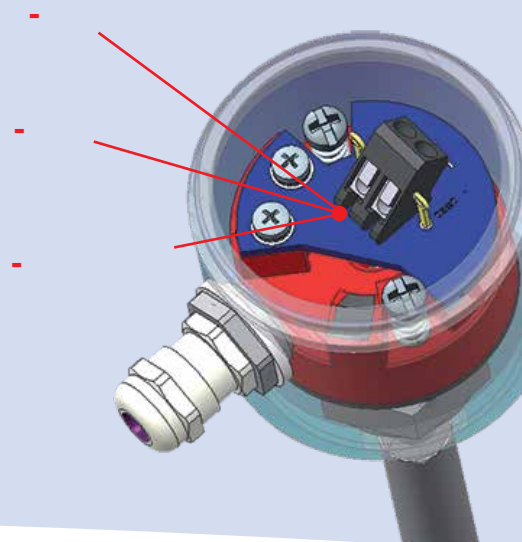

CULTURE OF VALUES

: HENGESBACH



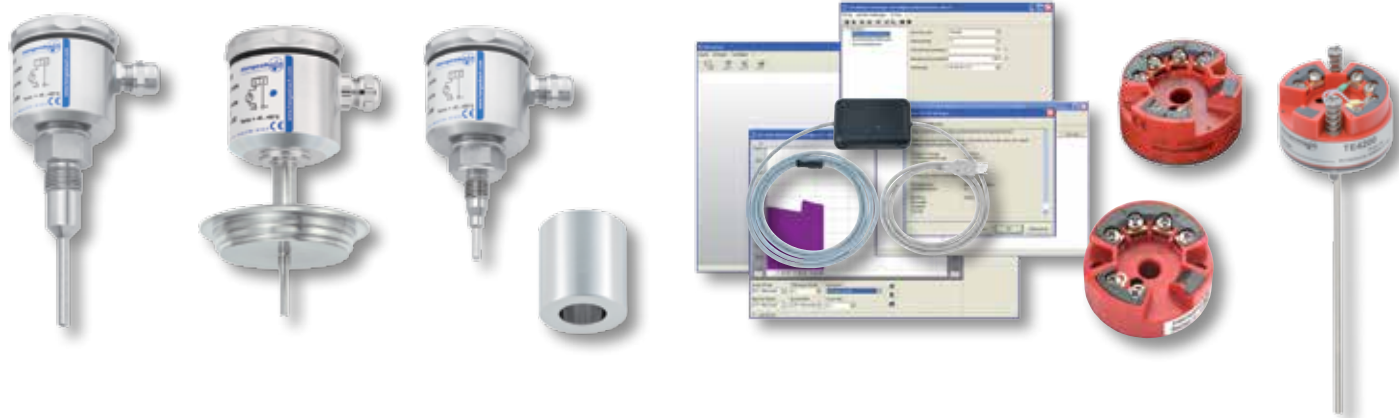

-
-
-
- 2- 4-20 , HART® Profibus,
- Pt100 Pt100

- TP16 G1/2"
- TP26 M12x1.5
- TP19 VARIVENT®,
- TP15
- clamp DIN32676, DIN11851, ...

-
-
-
- , 4-20 HART® Profibus,
- 2, 3 4-



TP50 / TP51 / TP52

-




-
- Pt100 4- 2- A
- 4-20
- M12x1 Quicktemp

-
- 4-20 , HART® Profibus, 2-
- Pt100 2, 3 4- 2 3-
- /

-
- TP52 -
-
- Pt100

-

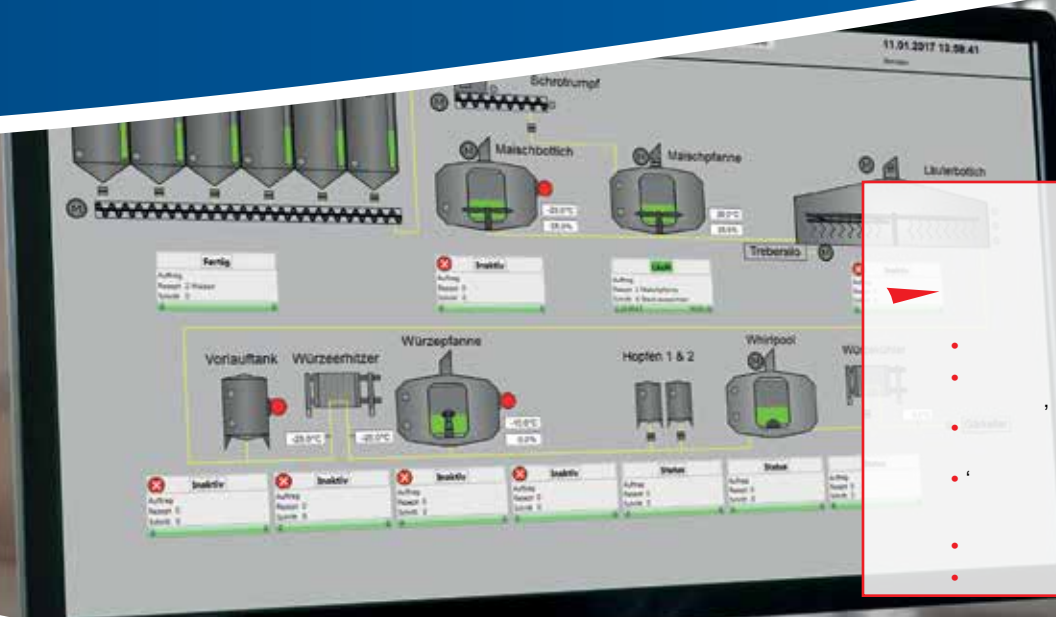

Hengesbach



Hengesbach



;



0.05% Д



EHEDG EL-Class I



VALUE-FORMING

: HENGESBACH

"Made in Germany",

Hengesbach.



- | | |
|---------------|----------------|
| Egypt | Romania |
| Benelux | Russia |
| Bulgaria | Switzerland |
| China | Singapore |
| Denmark | Spain |
| Great Britain | South Afrika |
| India | South Amerika |
| Israel | Thailand |
| Malaysia | Czech Republic |
| Mexico | Turkey |
| Austria | Ukraine |
| Poland | Vietnam |



Hengesbach GmbH & Co. KG

Schimmelbuschstr. 17
 40699 Erkrath · Germany

Phone +49 (0) 21 04 / 30 32-0

Fax +49 (0) 21 04 / 30 32-22

E-mail: info@hengeschbach.com

Россия, Москва, 127411,
 , 157, . 9, 9234

Te .: +7 495 259 24 81

E-mail: info@prometrolog.ru

www.prometrolog.ru

